Catalog
UPS

2025

AEC

www.aecups.com

UPS Online | Series RADIANT

Power capacity: 10-60 kVA

AEC Radiant Series UPS (10–60 kVA) is a modular three-phase solution designed for maximum flexibility, efficiency, and resilience.
Built on a **scalable N+X architecture,** the system allows hot-swappable 10 kW power modules within a compact 60 kVA frame—ideal for growing power demands without system downtime.

Its modularity ensures redundancy and fault tolerance, reducing the risk of critical failures and simplifying maintenance operations. With high-efficiency online double conversion and **unity power factor (PF = 1)**, the Radiant Series delivers clean, reliable power while minimizing energy losses.

Description

Radiant unit features a fully programmable touchscreen display, giving technicians complete access to system parameters, configuration, and diagnostics.
Equipped with a **powerful 40A charger**, it supports fast and efficient battery recharging—ideal for extended autonomy setups.
Battery configurations are highly flexible, allowing tailored runtimes to meet the specific needs of each installation. The **modular design** supports **N+1 and N+N redundancy**, ensuring uninterrupted operation even in fault conditions or maintenance events.
Versatile input/output compatibility (1:1, 3:1, or 3:3) makes the Radiant UPS adaptable to a wide range of power environments, including 120V and 208V systems.
Seamless communication integration is enabled via RS-232, USB, SNMP, and dry contacts, with optional parallel kits for future capacity expansion.

UPS Uninterruptible Power Supply
Modular technology N+X;

Unity output power factory PF=1 **kVA=kW**;

Three level IGBT Technology;

Powerfull standard charger 40A settable;

7" Touch screen color display;

Input-Output 1:1 3:1 3:3 in 208/120V;

Ultra-high efficiency up to **96%**;

Hot-swappable power module 10kVA;

Multiple communications RS232+EPO+USB Standard;

Parallel up to 8 units.

Features

TIER 1 UPS
Highest efficiency

High-rate VRLA
Batteries

8A Charger for fast
recharge

THREE LEVEL 3 UPS

kW = kVA

96% Efficiency

WARRANTY 2 YEARS

24h/7 ASSISTANCE

Scan the QR code to find out more informations on RADIANT UPS!

UPS Modular technology N+X

Modular UPS technology revolutionizes power protection by offering scalability, flexibility, and serviceability in a single solution. Unlike traditional monolithic systems, a modular UPS is composed of independent power modules that can be added, removed, or replaced without shutting down the system.

This architecture enables N+X redundancy, where "N" is the number of modules required to support the full load, and "X" represents additional modules for backup. For example, a 50 kW load can be protected by six 10 kW modules (N=5, X=1), ensuring continued operation even if one module fails.

Details

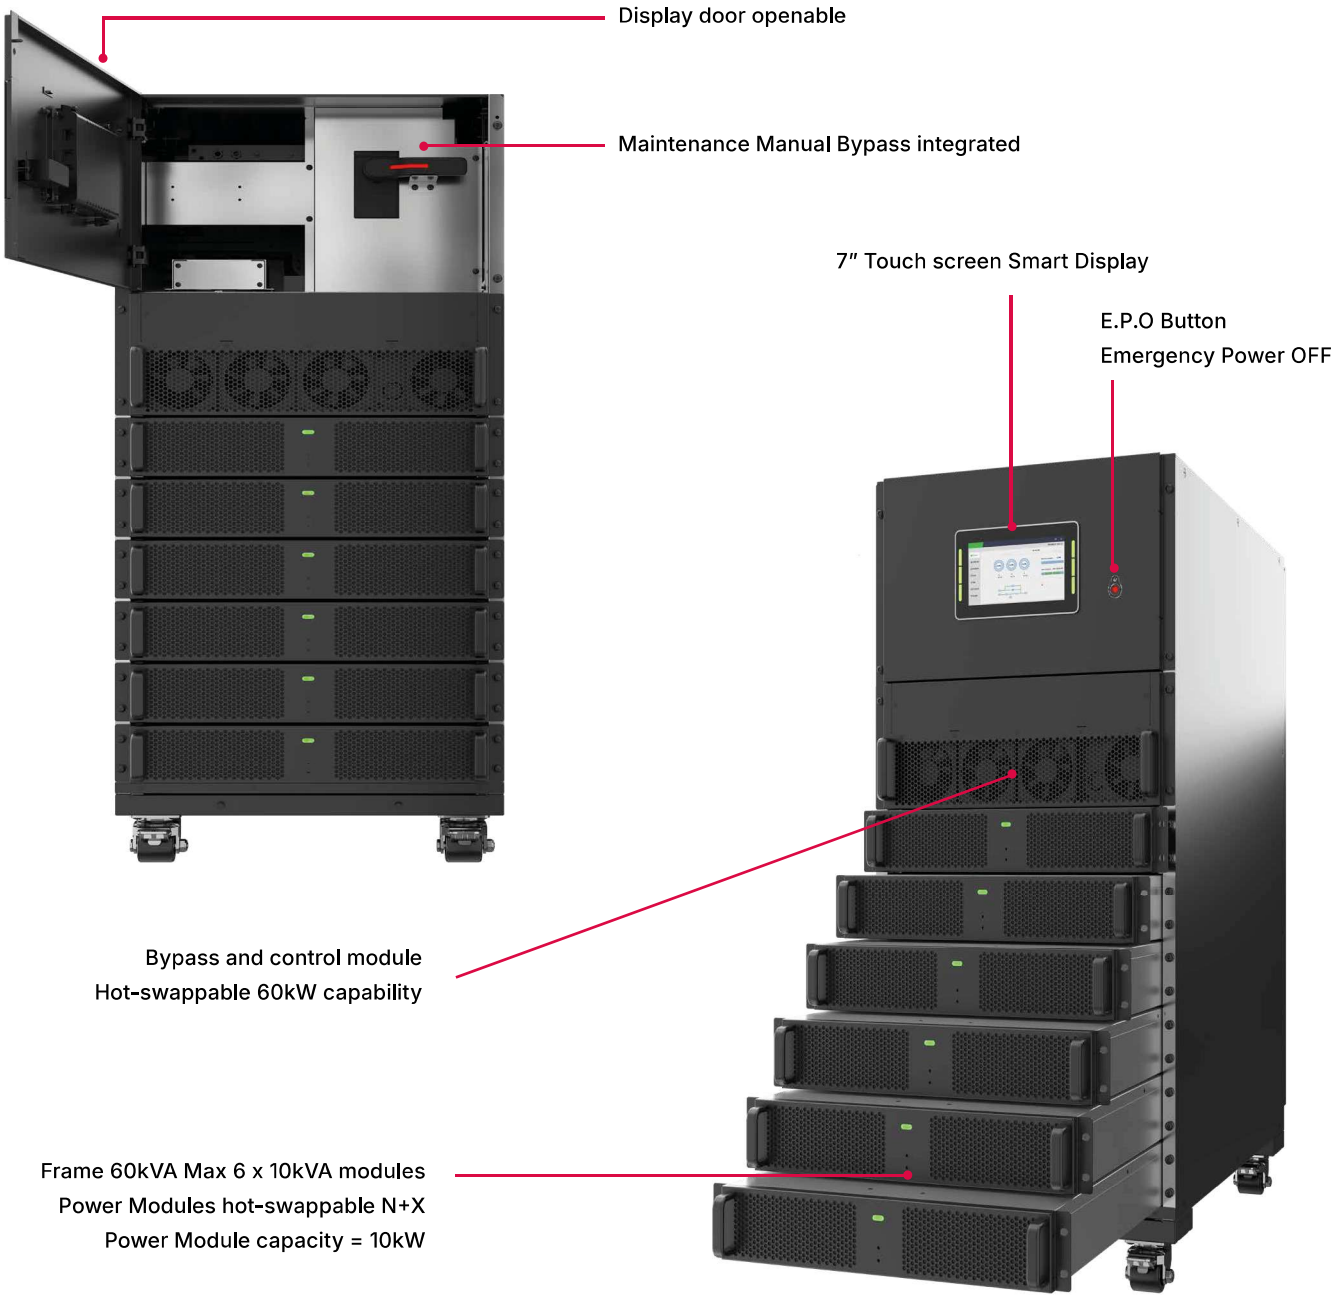

RADIANT 10-60kVA

Touch screen Smart Display

Clear Display: A 7-inch color touchscreen provides an easy and intuitive way to control the UPS.

Secure Access: Three access levels (User, Technician, Manufacturer) protect system settings.

Full Configuration: Adjust input, output, battery, communication, language, and operating modes directly from the screen.

Live Monitoring: View real-time data like voltage, load, frequency, and battery status by cell at a glance.

Event History: The UPS logs up to 10,000 events, downloadable via the built-in USB port.

Generator Ready: Advanced settings ensure stable operation and communications with diesel generators.

Custom Alarms: Set and manage dry contact alarms right from the touchscreen.

Self-Cleaning: Automatic fan cycles help remove dust and keep internal parts clean.

Waveform Display: The system periodically records inverter, rectifier, and control waveforms for diagnostics.

7 inches Touch Screen

Three level IGBT technology

A 3-level IGBT inverter introduces an intermediate voltage state (0 V), yielding three discrete levels: +Vdc, 0 V, and –Vdc.

This small enhancement dramatically improves performance:

Cleaner waveform: The staircase-shaped output more closely resembles a sine wave, reducing THD and interference.

Lower Harmonic Distortion (THD): 3 level IGBT reduces THD compared to the 2-level's rough waveform, improving power quality and reducing harmonic pollution.

Lower switching stress: Smaller voltage transitions mean each IGBT experiences less stress and switching loss, allowing for the use of lower-voltage, faster devices.

Higher efficiency: With reduced losses, heat dissipation and improved waveform quality, efficiency jumps above 96%, especially in new demanding critical power applications.

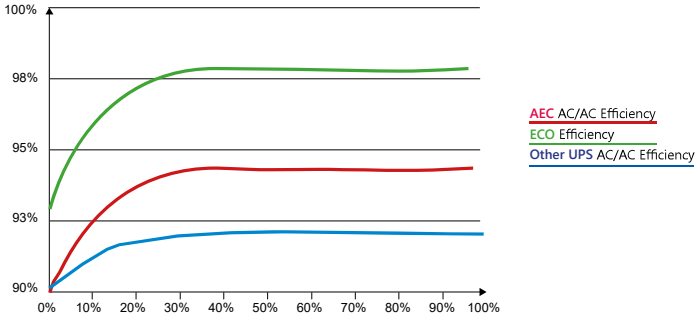

Standards and certifications

Scan the QR code to download the User Manual RADIANT 10-60kVA!

Technical specifications

MODELS	RAD60-XX10
Input	
Voltage (VAC)	200/208/220VAC(L-L)
Frequency (HZ)	40~70Hz
Input range (VAC)	166-261Vac(L-L)@full load, 125-166Vac(L-L) power derate from 100% to 75%
Power factory	≥0.99
THDI	≤3%
Phase	3W+N+G
Output	
Power Module (kW)	10kVA
Frame capacity (kW)	60kVA (Max 6 Modules x 10kVA)
Power factor	1
Voltage (VAC)	200/208/220VAC(L-L)
Frequency (HZ)	50/60±0.1
THD	≤1%THD, linear load; ≤5%THD, non-linear load
Waveform	Pure sinewave
AC/AC Efficency	96%
Overload	110% 1 hour, 125%10 mins, 150% 1 min, >150% 200ms
Battery	
Voltage (VDC)	±120Vdc (20 batteries) or ±132Vdc (22 batteries) settable by display
Standard battery set	±120Vdc
Max. current Charger (A)	20% * UPS maximum capacity
Other specifications	
Recharging time	< 6 Hours
Communications	Standard: RS232, E.P.O Contact and USB Port Optional: SNMP, Modbus, Dry contact
Noise (DB)	<50dB
Temperature (°F - °C)	0°C - 40°C 32°F - 104°F
Umidity	<95%
Dimensions (W*D*H) in	19*27.5*33 in (19U) wheels not included
Dimensions (W*D*H) cm	48.2*70*83.8 cm (19U) wheels not included
Frame Weight (Lb - Kg)	207 Lb - 94 Kg
Power Module (Lb-Kg)	37.5 Lb - 17 Kg
Certifications	
Standards	CE (IEC EN 62040-1; EMC IEC EN 62040-2; IEC EN 62040-3); UL1778

All information is for reference only, subject to change by AEC at any time, and does not constitute contractual obligations.

AEC Italy

Via Nerviano, 55
20045 Lainate (MI), Italia
+39 02 94158991

AEC USA

244 Biscanye Blvd Miami
33132 Florida USA
+786 991 9578

CONTATTI

www.ups.aecups.com
IT info@aecups.com
US sales@aecups.com